



ROTEX® S-H Flexible jaw couplings


Drop-out center design coupling with SPLIT hubs

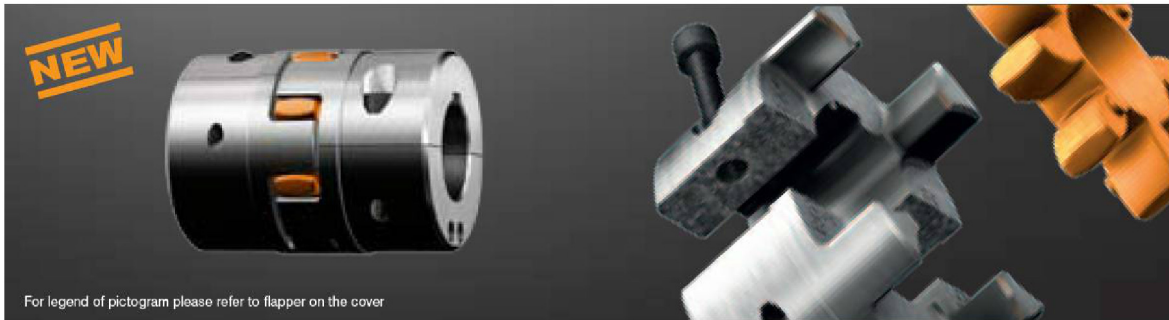

For legend of pictogram please refer to flapper on the cover



Components

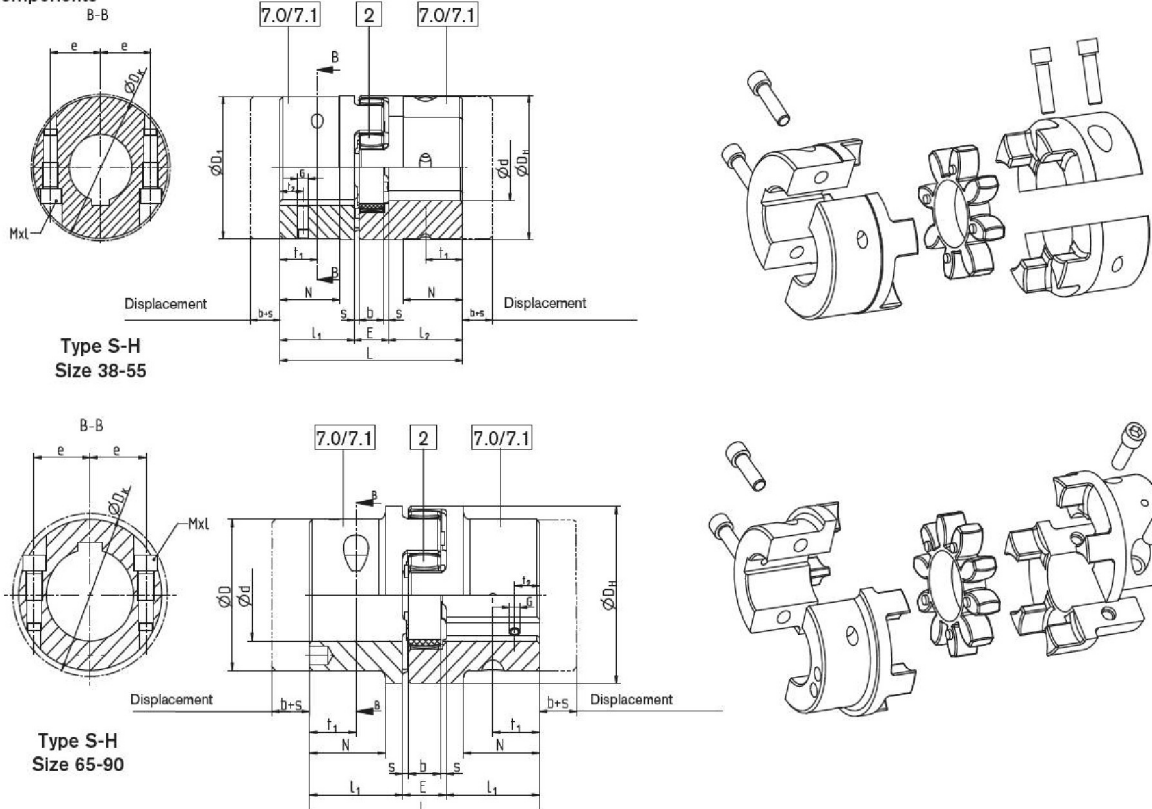

Type S-H
Size 38-55

Type S-H
Size 65-90

ROTEX® Type S-H																	
Size	Finish bore $\varnothing d$ [mm]		Dimensions [mm]													Cyl. screws DIN EN ISO 4762	
	minimum	maximum	L	$l_1; l_2$	E	b	s	D_H	D_1	D_K	N	e	t_1	t_2	G	Mxl	Tightening torque T_A [Nm]
38	24	45	114	45	24	18	3	80	78	83,5	37	30	22,5	15	M8	M8x30	34
42	24	55	126	50	26	20	3	95	94	97	40	30	25			M10x30	67
48	24	60	140	56	28	21	3,5	105	104	108,5	45	35	28			M12x35	115
55	24	70	160	65	30	22	4	120	118	122	52	40	32,5	20	M10	M12x40	115
	70	80	185	75	35	26	4,5	135	115	123,5	61	45	37,5			M12x40	115
75	40	80	210	85	40	30	5	160	135	147	69	51	42,5	25		M16x50	290
	80	90							180	158							
90	40	90	245	100	45	34	5,5	200	160	176	81	60	50	30	M12	M20x60	560
	90	110							200	197							

7.0= SPLIT hub without feather keyway
7.1= SPLIT hub with feather keyway

Ordering example:	ROTEX® 38	S-H	98 Sh-A	7.1	$\varnothing 38$	7.1	$\varnothing 30$
	Coupling size	Type	Spider hardness	Hub type	Finish bore	Hub type	Finish bore