

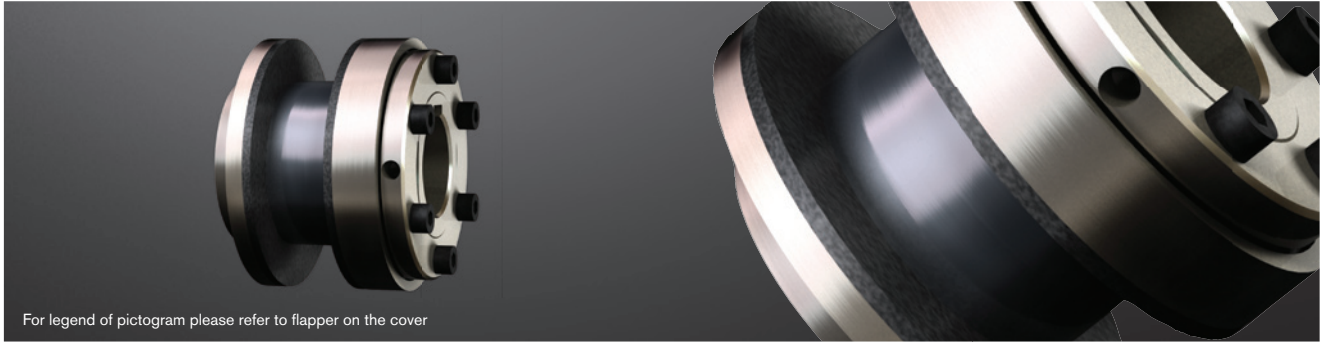


RUFLEX® Torque limiters

Max. type

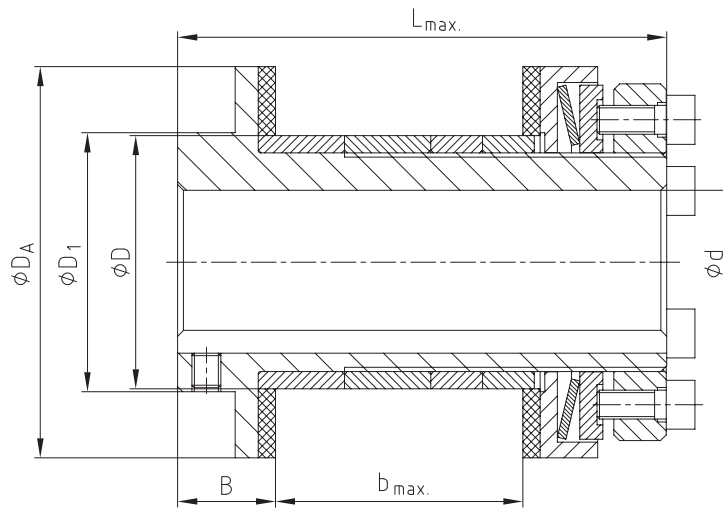

For legend of pictogram please refer to flapper on the cover




Technical data – Dimensions

Size	Max. speed ³⁾ [rpm]	Torques [Nm]			Dimensions [mm]							
		1TF	2TF	3TF ²⁾	Max. bore	D ₁	D _A	B	Maximum	b	D ¹⁾	Maximum
01	6600	5-35	10-70	–	22	40	58	16	33	40	70	
1	5600	20-75	40-150	130-200	25	45	68	17	43	44	85	
2	4300	25-140	50-280	250-400	35	58	88	19	54	58	100	
3	3300	50-300	100-600	550-800	45	75	115	21	62	72	115	
4	2700	90-600	180-1200	1100-1600	55	90	140	23	91,5	85	154	

¹⁾ Bore tolerance (drive component): F8

²⁾ With clamping setting nut, to use only for designs with limited dimensions

³⁾ See comments on page 231

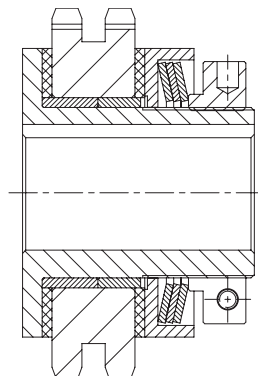

Example:

- RUFLEX® max. with sprocket assembled
- Available as a complete component assembly with torque preset

Ordering example:

RUFLEX® max. 1	2TF	b 35	d Ø20
Type/size	Disk spring layer	Width of drive component b	Finish bore